














3/2		电控-弹簧		订货号		电控-弹簧		5/2					
  重量 390g 最小工作压力 2.5 bar				514/N.Ⓟ.0.1.M2		  重量 450g 最小工作压力 2.5 bar							
				类型									
				Ⓟ 32 = 两位三通									
				52 = 两位五通									
													
技术特性		介质		最大工作压力		工作温度		名义流量 (NL/min)		通径		工作口径	
		过滤空气 润滑或无润滑		10 bar		-5°C ~ +50°C		1030 NL/min		7 mm		G1/4"	

3/2		电控-压差		订货号		电控-压差		5/2					
  重量 390g 最小工作压力 2.5 bar				514/N.0.12.M2		  重量 450g 最小工作压力 2.5 bar							
				类型									
				T 32 = 两位三通 52 = 两位五通									
													
技术特性		介质		最大工作压力		工作温度		名义流量 (NL/min)		通径		工作口径	
		过滤空气, 润滑或无润滑		10 bar		-5°C ~ +50°C		1030 NL/min		7 mm		G1/4"	

3/2		双电控		订货号		双电控		5/2					
   重量 470g 最小工作压力 2.5 bar				514/N.Ⓣ.0.0.M2		   重量 530g 最小工作压力 2.5 bar							
										类型			
										Ⓣ 32 = 两位三通 52 = 两位五通			
技术特性		介质		最大工作压力		工作温度		名义流量 (NL/min)		通径		工作口径	
		过滤空气, 润滑或无润滑		10 bar		-5°C ~ +50°C		1030 NL/min		7 mm		G1/4"	



气控-压差/双气控/气控-弹簧

4/2
5/2

订货号

T514.1.00.F

类型

42 = 两位四通
52 = 两位五通

功能

16 = 气控 - 压差
18 = 双气控
19 = 气控 - 弹簧

重量 140g
最小先导压力 2.5 bar

接头最大安装扭矩为 9 Nm

技术特性	介质	最大工作压力	工作温度	名义流量 (NL/min)	通径	工作口径
	过滤空气, 润滑或无润滑	10 bar	-5°C ~ +50°C	1100 NL/min	8 mm	G1/4"

双电控

4/2
5/2

订货号

T514.1.00.35.V

类型

42 = 两位四通
52 = 两位五通

电压

B04 = 12V D.C.
B05 = 24V D.C.
B09 = 24V D.C.(2W)
B56 = 24V A.C. 50-60Hz
B57 = 110V A.C. 50-60Hz
B58 = 220V A.C. 50-60Hz

重量 250g
最小先导压力 2.5 bar
接头最大安装扭矩为 9 Nm

技术特性	介质	最大工作压力	工作温度	名义流量 (NL/min)	通径	工作口径
	过滤空气, 润滑或无润滑	10 bar	-5°C ~ +50°C	1100 NL/min	8 mm	G1/4"













电控-弹簧/电控-压差

4/2
5/2

订货号

T514.T.00.F.V

T	类型
	42 = 两位四通 52 = 两位五通
F	功能
	36 = 电控 - 压差 39 = 电控 - 弹簧
V	电压
	B04 = 12V D.C.
	B05 = 24V D.C.
	B09 = 24V D.C.(2W)
	B56 = 24V A.C. 50-60Hz
	B57 = 110V A.C. 50-60Hz
	B58 = 220V A.C. 50-60Hz

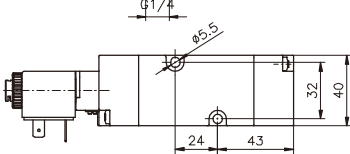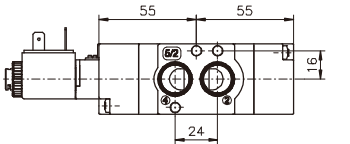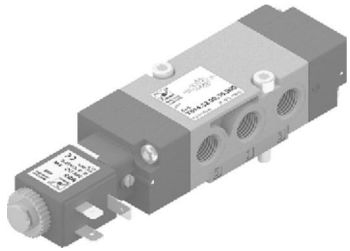

重量 200g
最小先导压力 2.5 bar
接头最大安装扭矩为 9 Nm

技术特性




介质	最大工作压力	工作温度	名义流量 (NL/min)	通径	工作口径
过滤空气, 润滑或无润滑	10 bar	-5°C ~ +50°C	1100 NL/min	8 mm	G1/4"

通用配件

订货号

T514.92.00.F.V

F	功能
	16 = 气控 - 压差 18 = 双气控 19 = 气控 - 弹簧 35 = 双电控 36 = 电控 - 压差 39 = 电控 - 弹簧
V	电压
	B04 = 12V D.C.
	B05 = 24V D.C.
	B09 = 24V D.C.(2W)
	B56 = 24V A.C. 50-60Hz
	B57 = 110V A.C. 50-60Hz
	B58 = 220V A.C. 50-60Hz

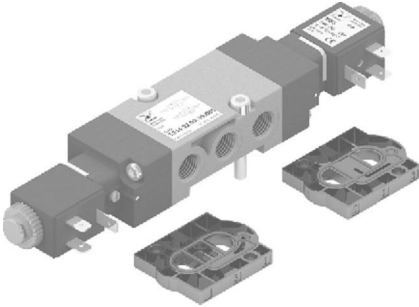

重量 170g
最小先导压力 2.5 bar
接头最大安装扭矩为 9 Nm



把一个5/2 阀改成 4/2:
将底板更换为通用配件中的底板 (订货号T514.92....) 然后堵上 5口

技术特性

介质	最大工作压力	工作温度	名义流量 (NL/min)	通径	工作口径
过滤空气, 润滑或无润滑	10 bar	-5°C ~ +50°C	1100 NL/min	8 mm	G1/4"